2360 SHELTER SYSTEM

Part Number SW-2360BC Large Scale Operational System





The 2360 Shelter System is our largest single shelter operational system. This system provides 1,274 square feet of space, and is built to sustain large scale military operations, camp dining, as well as alternative care and hospital accommodations.

Key Features and Benefits

- Rapid deployment without aid of ancillary equipment, no tools necessary
- Vertical walls to maximize usable square footage of over 1270 sq. ft
- · Sealable vinyl floor maintains environmentally secure shelter
- Can be configured with roof or walls only for maximum flexibility in deployment
- Interior frame allows access to horizontal support bars capable of hanging supples or equipment up to 50 lbs
- Rigid double doors provide a large entryway with ramp, to allow use of wheel chairs, gurneys and movement of large equipment in and out of shelter
- · Roof vent caps significantly reduce condensation
- Assemble and Dissemble in 40 to 60 minutes with a 6 to 8 person crew
- Framework design allows individual replacement of parts
- · Flame retardant vinyl allows for safe occupation of shelter
- \cdot UV resistant, resists mildew and abrasion for longer life


Standard Components


- \cdot Aircraft aluminum mainframe assembly
- \cdot Wiring harness with 16 outlets
- 14 oz. vinyl wall panels (8)
- 14 oz. vinyl roof panel
- 18 oz. sealable vinyl floor
- \cdot Double door with door ramp (4)
- Roof vent cap (2)
- \cdot High-wind tie down kit 16 anchor points
- Expansion wall strips
- Vinyl repair kit
- Vinyl storage/transport bags

MILITARY

This addition to the Western Shelter line can be bought individually or as a pre-packaged system to handle a larger response area. Its easily collapsible package allows for quick and efficient transport by ground or air.

Shelter Dimensions

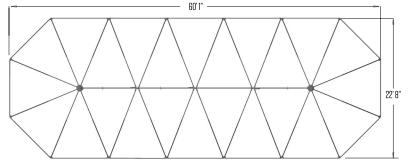



2360 SHELTER SYSTEM

Part Number SW-2360BC Large Scale Operational System



SW-2360 Specifications NSN Pending

Usable Area	22' 8" x 60' 1" (5.7 x 10.4 m)
Total Weight	998 lbs (452 kg)
Environment	-20°F to 140°F (-40°C to 60°C)
Snow Load	10 lbs / ft ² for 12 hrs $(50 \text{ kg} / \text{m}^2 \text{ for 12 hrs})$
Wind Load	55 mph w/gusts to 65 mph $$ (89 km/h w/gusts to 105 km / h) $$
Time Under Canopy	40 min / 4 personnel
Total Set-Up Time	60 min / 6 personnel
Dimensions	
Footprint	22' 8" x 60' 1" (5.7 x 10.4 m)
Sidewall	6' (1.8m)
Peak	12' (3.6m)
Square Footage	1274 ft ² (388m ²)
Cube	7644 ft ³ (216m ³)
Packaged Dimension	18
Roof	21 x 23 x 14" (53 x 58.5 x 35.5 cm)
Door (2)	26 x 3.5 x 72" (66 x 9 x 183 cm)
Wall	28 x 28 x 14" (71 x 71 x 35.5 cm)
Vinyl Floor	23 x 20 x 14" (58.5 x 51 x 35.5 cm)
Frame #1	91 x 91 x 16" (231 x 231 x 40.5 cm)
Frame #2	91 x 14 x 16" (231 x 35.5 x 40.5 cm)
Berry Compliant	\checkmark

Recommended Support Systems

Shelter Connecting Systems

Increase the footprint of your shelter system with rigid frame connectors and entryways

Electrical Distribution

Portable power and lighting to sustain your shelter complex

Climate Control

Air heating, cooling, purifying and dehumidifying

Water Distribution

Purification, storage, heating and distribution kits

Hygiene Systems

Field showers and toilet stations

Storage And Transport

Heavy-duty cases and customizable cargo trailers

Digital ID

Your logo or name custom printed on roofs and doors for easy identification

Anchoring Systems

Secure your shelter against high winds

Shelter Accessories

Beds, work stations, tables, seating and food prep





