




RDS-150 OVERVIEW



RDS-150 FEATURES

- Under canopy with only 2 people in under 4 minutes
- Fully integrated floor and liner comes standard with each RDS-150
- Comes standard with TEMPER vestibule adapter
- No special kits for snow, wind or rain load
- RDS-150 must be staked and the use of guy lines is required - all come complete with each tent system
- Perfect for highly expeditionary needs and fits in the back of HMMWV
- Easily boots to all fielded tents models and most vehicles
- Superior replacement for the Base-X 103 or DRASH C-series or SICPS

RDS-150 END VIEW

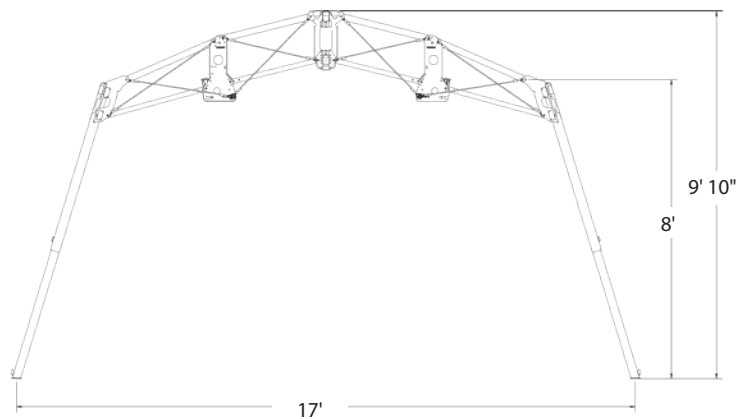

RDS-150 SPECIFICATIONS

Model Name:	RDS-150	
NSN / Product Code Tan:	8340-01-540-9961	Product Code 2480570
NSN / Product Code Green:	8340-01-540-9960	Product Code 2480540
Width:	Exterior: 17' / 5.18m	Interior (with liner): 15'10" / 4.83m
Length:	Exterior: 10' / 3.05m	Interior (with liner): 9'3" / 2.82m
Area (usable):	145 sq. ft. / 13.47m²	
Eave Height (interior-usable w/liner):	6'11" / 2.11m	
Peak Height (interior-usable w/liner):	8'4" / 2.54m	
Minimum Site Area Required:	30'6" x 24'1" / 9.30m x 7.34m	
Pack #1 Size (frame & fabric):	74" x 29" x 15" / 1.88m x 0.737m x 0.381m	
Pack #2 Size (liner & floor):	48" x 36" x 7" / 1.22m x 0.914m x 0.178m	
Pack #3 Size (stakes & repair kit):	17" x 9" x 3" / 0.43m x 0.229m x 0.076m	
Weight Pack #1 (frame & fabric):	207 lbs. / 93.89kg	
Weight Pack #2 (liner & floor):	74 lbs. / 33.57kg	
Weight Pack #3 (stakes & repair kit):	20 lbs. / 9.07kg	
Total System Weight:	301 lbs. / 136.53kg	
ECU Ducts:	2 sets	
Windows:	2	
Stove Pipe Vents:	0 (available as an option)	
Doors:	2	
Personnel Required:	2	
Set-up Time:	<7 minutes	
Snow Load:	10 lbs. per sq ft. / 4.54kg	
Wind/Rain:	Sustained winds of 55/65 mph gusts (88.5km/h-104.61km/h); 2" (50.8mm) per hour	
Durability:	Exceeded requirement of 50 set and strikes	
Thermal Liner:	Available	
# of Lights:	4 (BATLITE LED lights)	
ECU Size:	3-ton (TES ECU)	
Hard Flooring:	(12) pc 42"x48" (BikeTrack Flooring)	

