





RDS-250 OVERVIEW

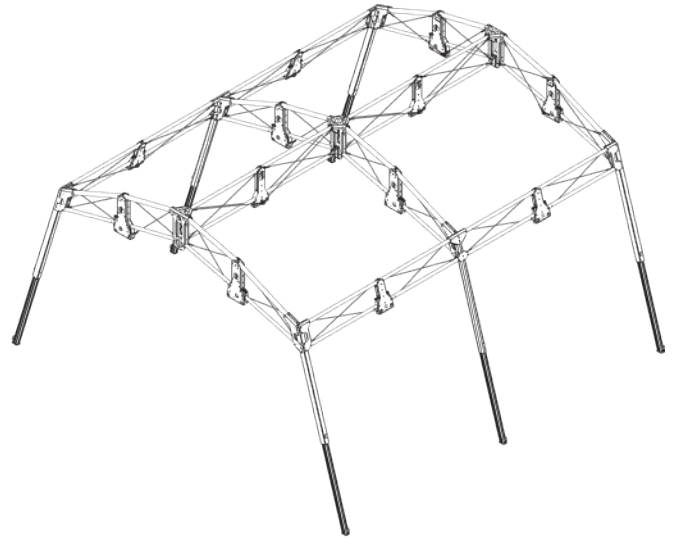

RDS-250 FEATURES

- Under canopy with only 2 people in under 4 minutes
- Fully integrated floor and liner comes standard with each RDS-250
- Comes standard with TEMPER vestibule adapter
- No special kits for snow, wind or rain load
- Perfect for highly expeditionary uses as auxiliary tents
- Easily boots to all fielded tents models and most vehicles
- Superior replacement for the Base-X 103 or DRASH C-series or SICPS

RDS-250 END VIEW

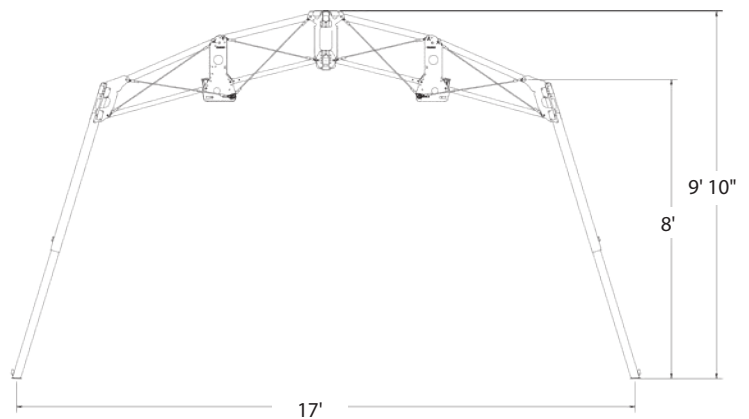

RDS-250 SPECIFICATIONS

Model Name:	RDS-250	
Product Code / Tan:	Product Code 2480598	
Product Code / Green:	Product Code 2480597	
Width:	Exterior: 17' / 5.18m	Interior (with liner): 15'10" / 4.83m
Length:	Exterior: 16' / 3.05m	Interior (with liner): 15'3" / 4.65m
Area (usable w/ liner):	240 sq. ft. / 22.30m ²	
Eave Height (interior-usable w/liner):	6'11" / 2.11m	
Peak Height (interior-usable w/liner):	8'4" / 2.54m	
Minimum Site Area Required:	30'6" x 30'1" / 9.30m x 9.17m	
Pack #1 Size (frame & fabric):	70" x 26" x 29" / 1.78m x 0.660m x 0.737m	
Pack #2 Size (liner & floor):	60" x 40" x 7" / 1.52m x 1.02m x 0.178m	
Pack #3 Size (sidewalls):	60" x 40" x 6" / 1.52m x 1.02m x 0.152m	
Pack #4 (stakes & repair kit):	22" x 10" x 6" / 0.559m x 0.254m x 0.152m	
Weight Pack #1 (frame & fabric):	275 lbs. / 124.74kg	
Weight Pack #2 (liner & floor):	85 lbs. / 38.56kg	
Weight Pack #3 (sidewalls):	77 lbs. / 34.93kg	
Weight Pack #4 (stakes & repair kit):	32 lbs. / 14.51kg	
Total System Weight:	469 lbs. / 212.73kg	
ECU Ducts:	2 sets	
Windows:	2	
Stove Pipe Vents:	0 (available as an option)	
Doors:	4	
Personnel Required:	3	
Set-up Time:	<7 minutes	
Snow Load:	10 lbs. per sq ft. / 4.54kg	
Wind/Rain:	Sustained winds of 55/65 mph gusts (88.5km/h-104.61km/h); 2" (50.8mm) per hour	
Durability:	Exceeded requirement of 50 set and strikes	
Thermal Liner:	Available	
# of Lights:	8 (BATLite™ LED lights)	
ECU Size:	3-ton (TES ECU)	
Hard Flooring:	16 pieces 42"x48" (BikeTrack Flooring)	