





RDS-320 OVERVIEW

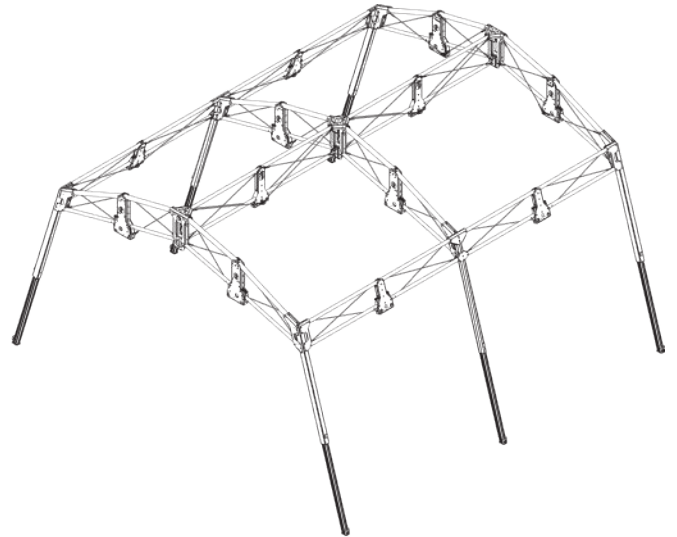

RDS-320 FEATURES

- Under canopy with only 3 people in under 8 minutes
- Fully integrated floor and liner comes standard with each RDS-320
- Comes standard with TEMPER vestibule adapter
- No special kits for snow, wind or rain load
- Perfect for highly expeditionary TOC's and other remote operations
- Easily boots to all fielded tents models and most vehicles
- Superior replacement for the Base-X 303 or DRASH C-series

RDS-320 END VIEW

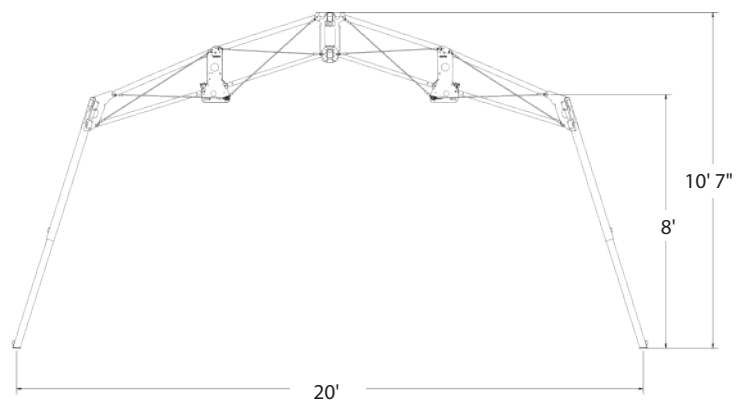

RDS-320 SPECIFICATIONS

Model Name:	RDS-320	
Product Code / Tan:	Product Code 2480572	
Product Code / Green:	Product Code 2480574	
Width:	Exterior: 20' / 6.10m	Interior (with liner): 18'9" / 5.72m
Length:	Exterior: 16' / 3.05m	Interior (with liner): 15'6" / 4.72m
Area (usable w/ liner):	285 sq. ft. / 26.48m ²	
Eave Height (interior-usable w/liner):	6'11" / 2.11m	
Peak Height (interior-usable w/liner):	8'11" / 2.72m	
Minimum Site Area Required:	20' x 16' / 6.10m x 3.05m	
Pack #1 Size (frame & fabric):	70" x 26" x 29" / 1.78m x 0.660m x 0.737m	
Pack #2 Size (liner & floor):	60" x 40" x 7" / 1.52m x 1.02m x 0.178m	
Pack #3 Size (sidewalls):	60" x 40" x 7" / 1.52m x 1.02m x 0.178m	
Pack #4 (stakes & repair kit):	22" x 10" x 6" / 0.559m x 0.254m x 0.152m	
Weight Pack #1 (frame & fabric):	290 lbs. / 131.54kg	
Weight Pack #2 (liner & floor):	90 lbs. / 40.82kg	
Weight Pack #3 (sidewalls):	82 lbs. / 36.29kg	
Weight Pack #4 (stakes & repair kit):	32 lbs. / 14.51kg	
Total System Weight:	494 lbs. / 224.07kg	
ECU Ducts:	2 sets	
Windows:	2	
Stove Pipe Vents:	0 (available as an option)	
Doors:	4	
Personnel Required:	3	
Set-up Time:	< 8 minutes	
Snow Load:	10 lbs. per sq ft. / 4.54kg	
Wind/Rain:	Sustained winds of 55/65 mph gusts (88.5km/h-104.61km/h); 2" (50.8mm) per hour	
Durability:	Exceeded requirement of 50 set and strikes	
Thermal Liner:	Available	
# of Lights:	8 (BATLite™ LED lights)	
ECU Size:	3-ton (TES ECU)	
Hard Flooring:	20 pieces 42"x48" (BikeTrack Flooring)	

