




RDS-460 OVERVIEW



RDS-460 FEATURES

- Under canopy with only 3 people in under 10 minutes
- Fully integrated floor and liner comes standard with each RDS-460
- Comes standard with TEMPER vestibule adapter
- No special kits for snow, wind or rain load
- Perfect for TOC's extensions and other highly expeditionary applications
- Easily boots to all fielded tents models and most vehicles
- Superior replacement for the Base-X 505 or DRASH MX-series

RDS-460 END VIEW

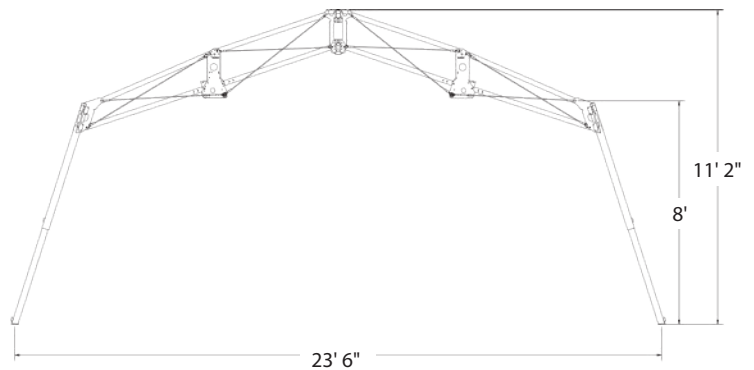

RDS-460 SPECIFICATIONS

Model Name:	RDS-460	
Product Code / Tan:	Product Code 2480615	
Product Code / Green:	Product Code 2480579	
Width:	Exterior: 23'6" / 7.16m	Interior (with liner): 22'6" / 6.86m
Length:	Exterior: 19'9" / 6.02m	Interior (with liner): 18'9" / 5.71m
Area (usable w/ liner):	466 sq. ft. / 43.29m ²	
Eave Height (interior-usable w/liner):	6'11" / 2.11m	
Peak Height (interior-usable w/liner):	9'4" / 2.84m	
Minimum Site Area Required:	23'6" x 19'9" / 7.16m x 6.02m	
Pack #1 Size (frame & fabric):	75" x 29" x 31" / 1.90m x 0.737m x 0.787m	
Pack #2 Size (liner & floor):	60" x 40" x 8" / 1.52m x 1.02m x 0.203m	
Pack #3 Size (sidewalls):	60" x 40" x 8" / 1.52m x 1.02m x 0.203m	
Pack #4 (stakes & repair kit):	22" x 10" x 6" / 0.559m x 0.254m x 0.152m	
Weight Pack #1 (frame & fabric):	420 lbs. / 190.51kg	
Weight Pack #2 (liner & floor):	100 lbs. / 45.36kg	
Weight Pack #3 (sidewalls):	93 lbs. / 42.18kg	
Weight Pack #4 (stakes & repair kit):	35 lbs. / 15.88kg	
Total System Weight:	648 lbs. / 293.93kg	
ECU Ducts:	2 sets	
Windows:	2	
Stove Pipe Vents:	0 (available as an option)	
Doors:	4	
Personnel Required:	3	
Set-up Time:	<10 minutes	
Snow Load:	10 lbs. per sq ft. / 4.54kg	
Wind/Rain:	Sustained winds of 55/65 mph gusts (88.5km/h-104.61km/h); 2" (50.8mm) per hour	
Durability:	Exceeded requirement of 50 set and strikes	
Thermal Liner:	Available	
# of Lights:	10 (BATLite™ LED lights)	
ECU Size:	5-ton (TES ECU)	
Hard Flooring:	24 pieces 42"x48" (BikeTrack Flooring)	

