




RDS-720 OVERVIEW



RDS-720 FEATURES

- Under canopy with only 4 people in under 18 minutes
- Fully integrated floor and liner comes standard with each RDS-720
- 8'11" eave height for more interior space for larger screens and projectors
- Comes standard with TEMPER vestibule adapter
- No special kits for snow, wind or rain load
- Perfect hub tent or operations center for larger TOC's or command applications
- Easily boots to all fielded tents models and most vehicles
- Superior replacement for the Base-X 505 or DRASH J-series

RDS-720 END VIEW

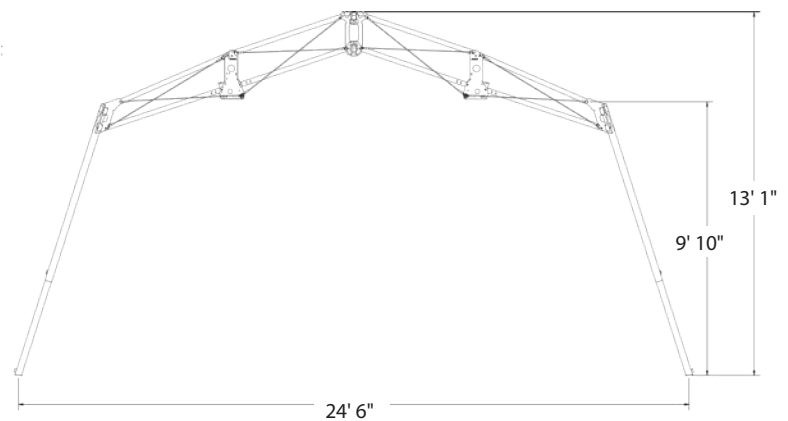

RDS-720 SPECIFICATIONS

Model Name:	RDS-720	
Product Code - Tan:	Product Code 2480577	
Product Code - Green:	Product Code 2480578	
Width:	Exterior: 24'6" 7.47m	Interior (with liner): 23'7" 7.19m
Length:	Exterior: 29'9" 9.07m	Interior (with liner): 28'9" 8.76m
Area (usable):	With liner: 675 sq. ft. 62.71m²	
Eave Height (interior-usable w/liner):	8'11" 2.72m	
Peak Height (interior-usable w/liner):	10'4" 3.15m	
Minimum Site Area Required:	37'x 42' 11.30m x 12.80m	
Pack #1 Size (frame & fabric):	94" x 37" x 31" 2.39m x 0.940m x 0.787m	
Pack #2 Size (liner & floor):	60" x 40" x 10" 1.52m x 1.02m x 0.254m	
Pack #3 Size (sidewalls):	60" x 40" x 10" 1.52m x 1.02m x 0.254m	
Pack #4 (stakes & repair kit):	22" x 12" x 8" 0.559m x 0.305m x 0.203m	
Weight Pack #1 (frame & fabric):	543 lbs. 246.30kg	
Weight Pack #2 (liner & floor):	140 lbs. 65.50kg	
Weight Pack #3 (sidewalls):	107 lbs. 48.53kg	
Weight Pack #4 (stakes & repair kit):	40 lbs. 18.14kg	
Total System Weight:	830 lbs. 376.48kg	
ECU Ducts:	4 sets	
Windows:	4	
Stove Pipe Vents:	2	
Doors:	4	
Personnel Required:	4	
Set-up Time:	<18 minutes	
Snow Load:	10 lbs. per sq ft. 4.54kg	
Wind/Rain:	Sustained winds of 55/65 mph gusts (88.5km/h-104.61km/h); 2" (50.8mm) per hour	
Durability:	Exceeded requirement of 50 set and strikes	
Thermal Liner:	Available	
# of Lights:	14 (BATLITE LED lights)	
ECU Size:	8-ton (TES ECU)	
Hard Flooring:	42 pieces 42"x48" (BikeTrack Flooring)	

